


4XR 4

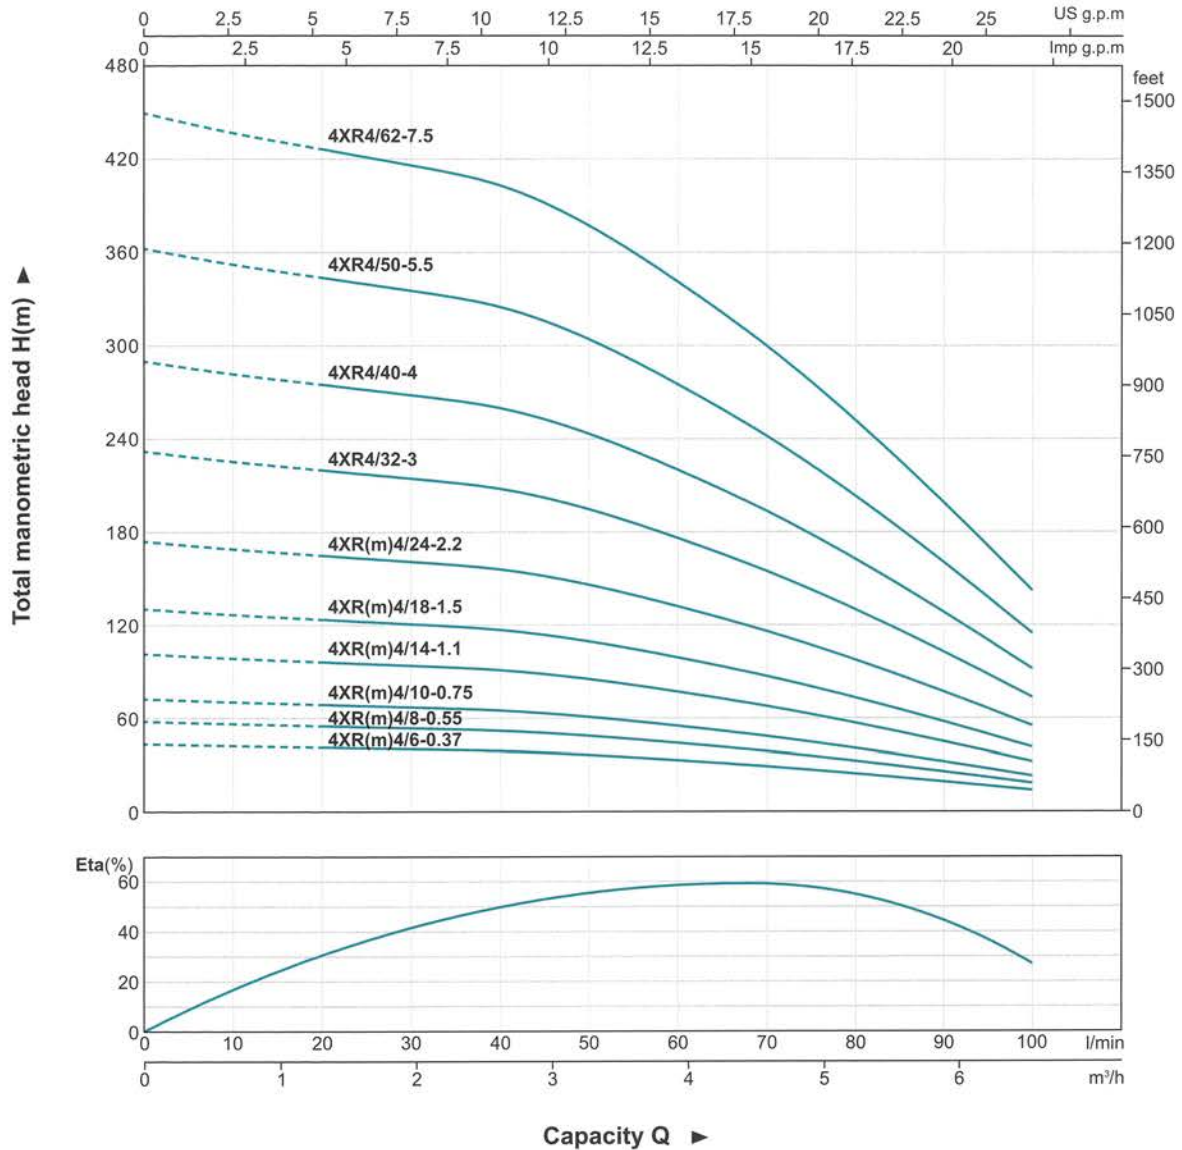

Technical Data

MODEL		P ₂		DELIVERY											n ≈ 2850 1/min			
1 ~ 220 - 240V	3 ~ 380 - 415V	kW	HP	Q	0	0.6	1.2	1.8	2.4	3.0	3.6	4.2	4.8	5.4	6.0	H(m)	0	100
					0	10	20	30	40	50	60	70	80	90	100			
4XRm4/6-0.37	4XR4/6-0.37	0.37	0.5	H(m)	44	42	41	40	39	36	33	29	24	19	14			
4XRm4/8-0.55	4XR4/8-0.55	0.55	0.75		58	56	55	54	52	49	44	39	33	26	18			
4XRm4/10-0.75	4XR4/10-0.75	0.75	1		73	70	69	67	65	61	55	48	41	32	23			
4XRm4/14-1.1	4XR4/14-1.1	1.1	1.5		102	98	96	94	91	85	77	68	57	45	32			
4XRm4/18-1.5	4XR4/18-1.5	1.5	2		131	127	124	121	117	109	99	87	73	58	41			
4XRm4/24-2.2	4XR4/24-2.2	2.2	3		174	169	165	161	156	146	132	116	98	77	55			
-	4XR4/32-3	3	4		232	225	220	215	208	195	176	155	130	103	73			
-	4XR4/40-4	4	5.5		290	281	275	268	260	243	220	194	163	128	92			
-	4XR4/50-5.5	5.5	7.5		363	352	344	335	325	304	275	242	203	160	115			
-	4XR4/62-7.5	7.5	10		450	436	426	416	403	377	341	300	252	199	142			