

READ THOROUGHLY BEFORE INSTALLATION



CAUTION RISK OF ELECTRIC SHOCK

These instructions do not intend to cover all details or variations in the fitting or provide for every possible contingency to be met in connection with installation, operation, or maintenance. Should further information be required or should any issues arise, please contact ADUROLIGHT.


Technical Parameters:

Dimming interface: Triac leading edge /ELV trailing edge	Output voltage: 25-40VDC
Input voltage: 220-240Vac	Output current: 150-350mA
Input current: 0.12A Max	Output Power: 5-15W
Frequency range: 50/60Hz	Maximum output voltage: 50V Max
Power factor: >0.8@230Vac full load	Strobe percentage: <1%
Efficiency: >75%@230Vac full load	Current accuracy: ± 5
Temperature: t_a 45 °C , t_c 75 °C	humidity: 20-85% RH

Output parameter setting:

DIP switch	ON ↓ ↓ 1 2	ON ↑ ↓ 1 2	ON ↑ ↑ 1 2
Output Current	one light	two lights	three lights
Output Voltage	25-40V	25-40V	25-40V
Output Power	5-8W	6.25-10W	8.75-15W

Instructions

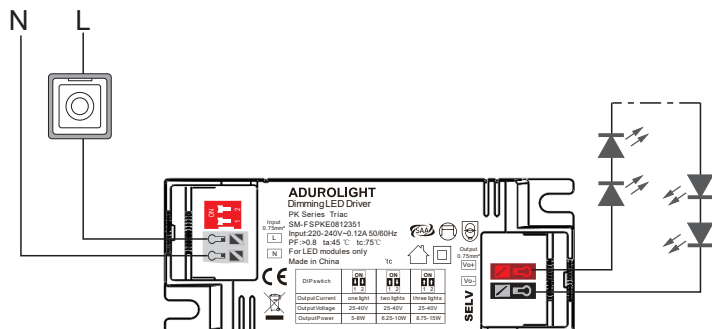


READ THOROUGHLY BEFORE INSTALLATION

⚠ CAUTION RISK OF ELECTRIC SHOCK


These instructions do not intend to cover all details or variations in the fitting or provide for every possible contingency to be met in connection with installation, operation, or maintenance. Should further information be required or should any issues arise, please contact ADUROLIGHT.

Overall installation

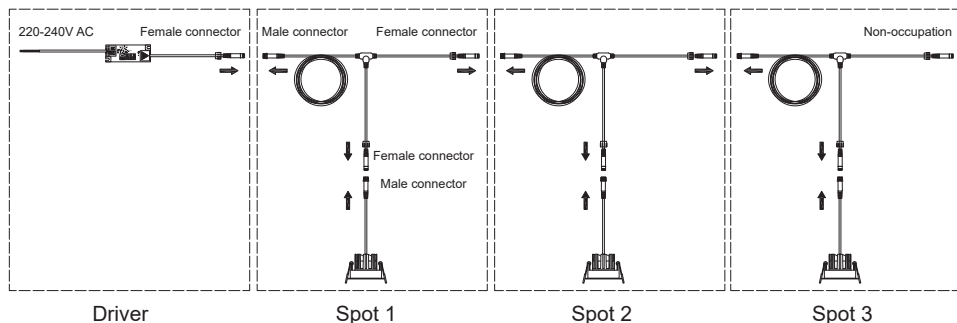


Installation Instruction


1. Cut off the power.



2. Cut the installation holes into the ceiling

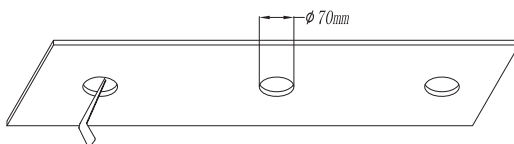


3. Connect the driver to the mains.




Adjust the output according to the power of the lights (Use method reference reverse).

4. Wiring according to the overall installation to connect the lamps.

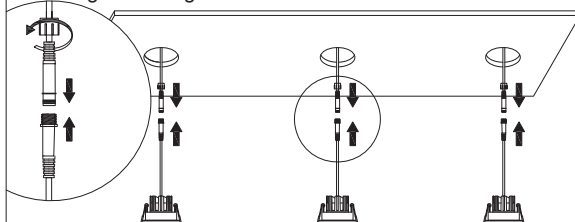

5. Push the springs in the upright position.



6. Finish.

