




Ti a 90° ridotto - 90° reducing tee - Té à 90° réduit - Te 90° reducida - T-Stück 90° reduziert - Тройник 90° редуционный

PE100RC - S5 Gas - PN 16 20°C

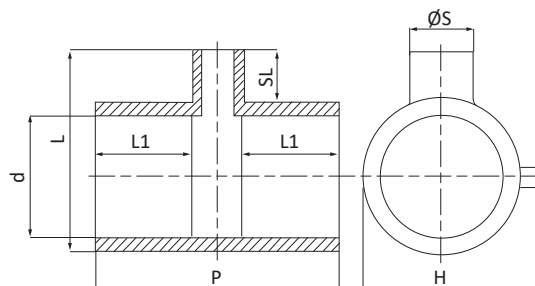

PE100 - SDR11 - S5

ACQUA: PFA (PN)=16 bar 20°C

GAS: MOP=10 bar; In Italia MOP=5 bar (D.M. 24/11/84, D.M. 16/4/2008 e successive modifiche)

Per il tempo di saldatura da utilizzare con tubo SDR26 contattare direttamente Unidelta.

PE100 - SDR11 - S5

WATER: PFA (PN)=16 bar 20°C

GAS: MOP=10 bar; in Italy MOP=5 bar (D.M. 24/11/84, D.M. 16/4/2008 and further modification)

Contact Unidelta directly for the welding time to be used with SDR26 pipe.

DIM dxØSxd [mm]	CODE	DIM MAX LxHxP [mm]	H [mm]	L [mm]	P [mm]	L1 [mm]	SL [mm]	W-SDR	PACK [UMV]	
									RIF. 10	Sfusi Loose
90x63x90	3007091064001	196x126x201	126	196	201	62	84	≤ 17	12	-
90x75x90	3007091076001	203x126x201	126	203	201	62	91	≤ 17	12	-
110x63x110	3007111064001	223x148x237	148	223	237	72	87	≤ 17	8	-
110x90x110	3007111091001	239x148x237	148	239	237	72	103	≤ 17	6	-
160x90x160	3007160090001	318x217x340	217	318	340	100	121	≤ 17	-	1
*180x90x180	3007180090001	340x241x360	241	340	360	105	119	≤ 17	-	1

* Disponibile solo a spira scoperta - * Available only with uncovered coil - * Disponible seulement avec spirale découverte

* Disponible sólo con resistencia no cubierta - * Nur mit entdeckten Windung verfügbar - * Доступно только с открытой спиралью