




3636

Giunto di transizione in ottone-PE filettato femmina - Brass to PE transition fitting female threaded - Joint de transition en laiton-PE fileté femelle - Racor de transición latón-PE roscado hembra - Übergangsstück Messing PE mit Innengewinde - Переходная муфта латунь-полиэтилен с внутренней резьбой

PE100RC/SDR 11 - S5 Gas - PN 16 20°C

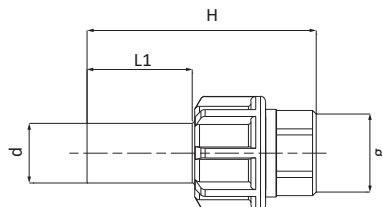

PE100RC - SDR11 - S5

ACQUA: PFA (PN)=16 bar 20°C

GAS: MOP=10 bar; In Italia MOP=5 bar (D.M. 24/11/84, D.M. 16/4/2008 e successive modifiche)

PE100RC - SDR11 - S5

WATER: PFA (PN)=16 bar 20°C

GAS: MOP=10 bar; in Italia MOP=5 bar (D.M. 24/11/84, D.M. 16/4/2008 and further modification)

DIM dxg [mmxin.]	CODE	DIM MAX LxHxP [mm]	L1 [mm]	H [mm]	PACK [UMV]	
					RIF. 2	RIF. 11
20x1/2"	3636020002001	41x84x41	40	84	-	70
25x3/4"	3636025003001	48x94x48	44	94	-	45
32x1"	3636032004001	55x102x55	47	102	-	30
40x1"1/4	3636040005001	67x115x67	52	115	-	15
50x1"1/2	3636050006001	82x126x82	58	126	-	8
63x2"	3636063007001	96x144x96	66	144	-	6
75x2"1/2	3636075008001	97x162x95	73	162	12	-
90x3"	3636090009001	114x180x114	82	180	6	-
110x4"	3636110010001	142x190x139	85	190	4	-