




RIV 4170

Ball valve F/F
 full bore
 aluminium lever handle

>> Tech drawings and tables

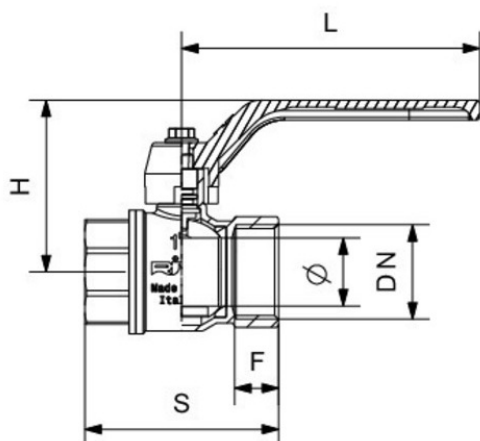


DN	Codice	Ø	H	S	L	F	PN	KG	P/box
1/4"	024170000002	10	46	45	80	12	64	0,119	30
3/8"	024170000003	10	48	45	80	12	64	0,121	30
1/2"	024170000004	14,5	50	48	80	13	40	0,146	30
3/4"	024170000005	19	57	57	90	14	32	0,244	10
1"	024170000007	24	60	69	90	16,5	32	0,367	10
1"1/4	024170000008	30,5	73	79	120	18	25	0,520	8
1"1/2	024170000009	37	86	89	135	19	25	0,847	6
2"	024170000011	47	98	109	160	22,5	25	1,353	4
2"1/2	024170000013	60	110	126	160	23	25	2,112	1
3"	024170000014	75	148	147	265	25	16	3,484	1
4"	024170000016	94	163	177	265	29	16	5,923	1

»» Approvals




>> Technical data

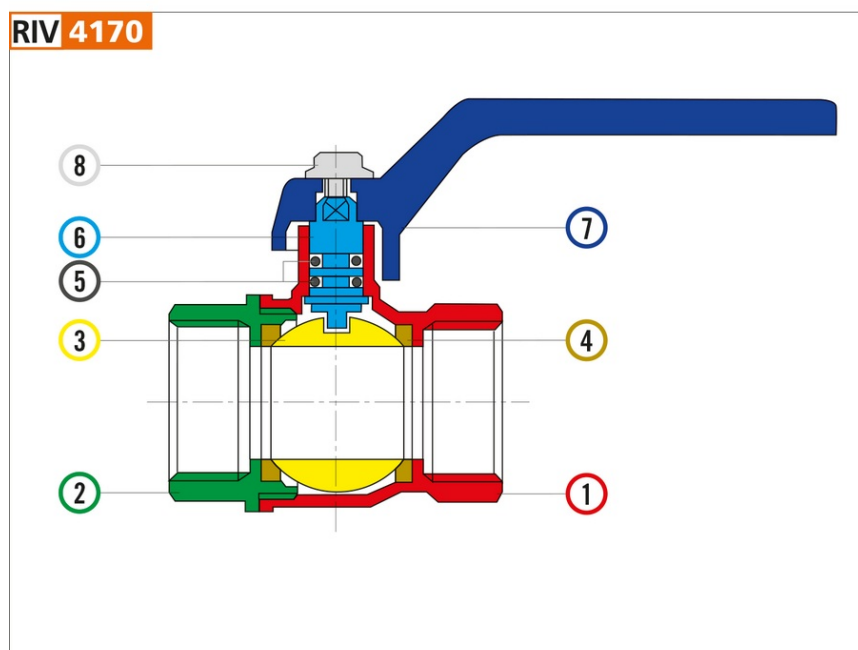


Materials				
1	Body	Brass	CW617N	Nickel-plated
2	Body end	Brass	CW617N	Nickel-plated
3	Ball	Brass	CW617N	Chrome-plated
4	Seats	P.T.F.E.		
5	O-Ring	NBR		
6	Stem	Brass	CW614N	
7	Lever	Aluminium		
8	Screw	Steel		Zinc-plated

Connection	ISO 228/1, ANSI B1.20.1 (NPT)
Limit	-20°C (without liquid) +110°C
Notes	The max.working pressure (PN) means at a room temperature of about 23°C.

>> Pressure Loss Chart

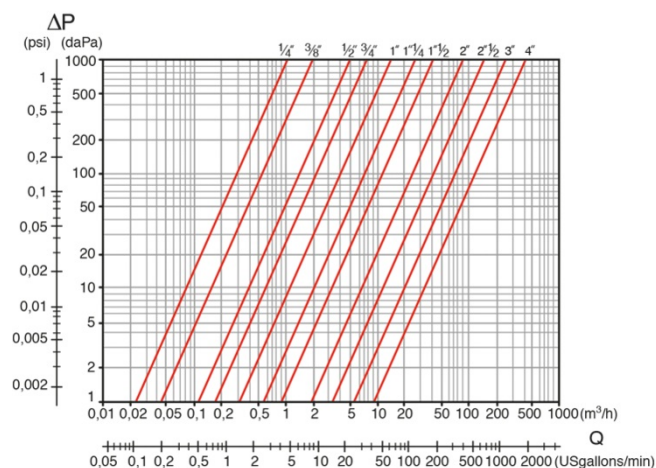

>> Temperature/Pressure

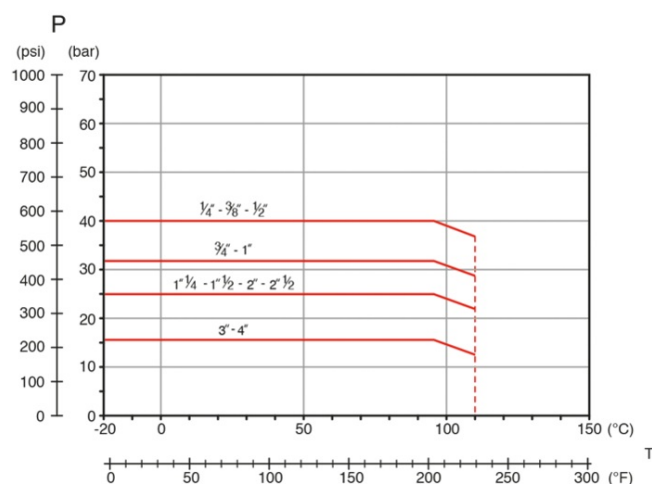

>> Kv & Cv Coefficients

Dimensione	Kv	Cv
1/4"	3,6	4,2
3/8"	6,6	76,0
1/2"	16,5	19,1
3/4"	25,0	29,0
1"	46,0	53,0
1"1/4	87,0	101,0
1"1/2	140,0	162,0
2"	275,0	318,0
2"1/2	500,0	578,0
3"	850,0	983,0
4"	1350,0	1562,0