




## RIV 3101

Female hose-connection

### Tech drawings and tables

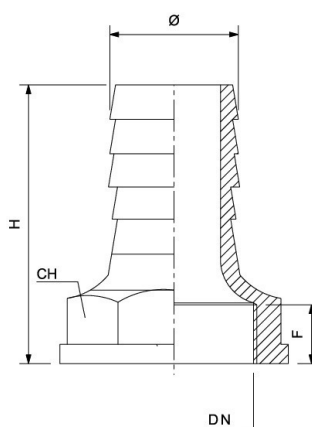


DNxØ	Code	H	F	PN	KG	P/box
1/8" x 8	033101000086	32	6	10	0,010	50
1/8" x 10	033101000087	32	6	10	0,010	50
1/4" x 10	033101000107	32	6	10	0,015	50
1/4" x 13	033101000110	33,5	7	10	0,016	50
3/8" x 10	033101000129	36	7	10	0,021	40
3/8" x 13	033101000132	38	8	10	0,024	30
3/8" x 15	033101000134	38	8	10	0,025	30
1/2" x 10	033101000161	39	9	10	0,028	50
1/2" x 13	033101000163	39	10	10	0,031	50
1/2" x 15	033101000165	39	10	10	0,032	50
1/2" x 18	033101000167	39	10	10	0,034	40
3/4" x 20	033101000210	44	9	10	0,045	25
3/4" x 25	033101000213	45	9	10	0,052	20
1" x 25	033101000247	52	10	10	0,081	30
1" x 30	033101000250	52	11	10	0,089	25
1"1/4 x 30	033101000290	55	11	10	0,101	15
1"1/4 x 32	033101000291	55	11	10	0,134	15
1"1/4 x 35	033101000292	58	12	10	0,131	15
1"1/2 x 40	033101000332	60	11	10	0,192	12
2" x 50	033101000371	77	15	10	0,371	6

## Technical data

Art. 3100

### Materials

1 Body Brass CW617N



### Connections

ISO 228/1

### Limit

-10°C (without liquid) +100°C

### Notes

The max. working pressure (PN) means at a room temperature of about 23°C.