




## RIV 2330

Tubular foot valve


### Tech drawings and tables

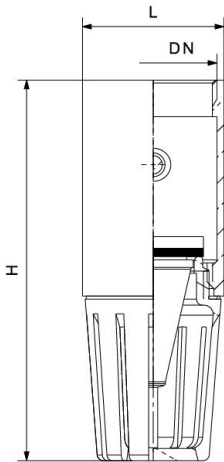

| DN    | Code         | H   | L   | PN | KG    | P/box |
|-------|--------------|-----|-----|----|-------|-------|
| 3/4"  | 032330000005 | 95  | 30  | 10 | 0,192 | 1     |
| 1"    | 032330000007 | 111 | 39  | 10 | 0,274 | 1     |
| 1"1/4 | 032330000008 | 127 | 46  | 8  | 0,470 | 1     |
| 1"1/2 | 032330000009 | 140 | 54  | 8  | 0,595 | 1     |
| 2"    | 032330000011 | 165 | 65  | 8  | 0,941 | 1     |
| 2"1/2 | 032330000013 | 173 | 82  | 6  | 1,600 | 1     |
| 3"    | 032330000014 | 196 | 99  | 6  | 2,313 | 1     |
| 4"    | 032330000016 | 218 | 116 | 6  | 3,661 | 1     |

## Technical data

RIV 2330



| Materials |           |        |                                      |
|-----------|-----------|--------|--------------------------------------|
| 1         | Body      | Brass  | CB754S                               |
| 2         | Filter    | Brass  | CB754S                               |
| 3         | Gasket    | Flibre |                                      |
| 4         | Gasket    | NR     |                                      |
| 5         | Obturator | Brass  | 3/4"-1"1/4 CW617N<br>1"1/2-4" CB754S |

|             |   |
|-------------|---|
| Connections | ISO 228/1   |
| Limit       | -10°C (without liquid) +90°C  |
| Notes       | The max. working pressure (PN) means at a room temperature of about 23°C. |