




## RIV 2540

Spring operated pressure relief valve with free discharge  
 PTFE seat  
 adjustable from 0 to 7 bar & from 8 to 16 bar


### Tech drawings and tables

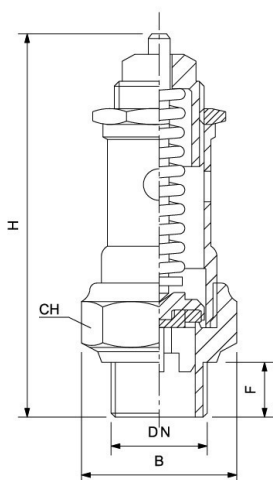

DN	Code	Ø	H	F	PN	KG	P/box
1/2"	032540000004	13	89	11,5	16	0,186	1
3/4"	032540000005	19	116,5	16	16	0,392	1
1"	032540000007	25,7	129	18	16	0,577	1
1"1/4	032540000008	31	148,5	23	16	1,133	1
1"1/2	032540000009	38	153	24,5	16	1,422	1
2"	032540000011	48	179	24,5	16	2,102	1

## Technical data

RIV 2545

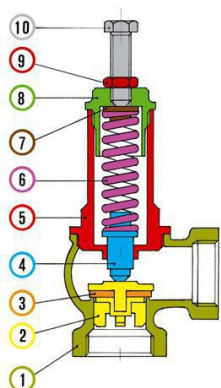

Materials			
1	Body	3/8"-2" Brass 2"1/2-3" Bronze	3/8"-2" CB754S 2"1/2-3" CB490K
2	Disc	Brass	CW617N
3	Gasket	P.T.F.E.	
4	Stem	Brass	CW614N
5	Bonnet	Brass	CW617N
6	Spring	Steel	
7	Pin	Brass	CW614N
8	Plug	Brass	CW614N
9	Nut	Brass	CW614N
10	Screw	Brass	CW614N

Connections	ISO 228/1
Limit	-10°C (without liquid) +180°C
Notes	The max. working pressure (PN) means at a room temperature of about 23°C.