




RIV 7534

Ball valve F/F
 with tamperproof key locking device
 and fitting for gas meter
 full bore
 (EN 331 MOP 5-20)
 aluminium butterfly handle

Tech drawings and tables

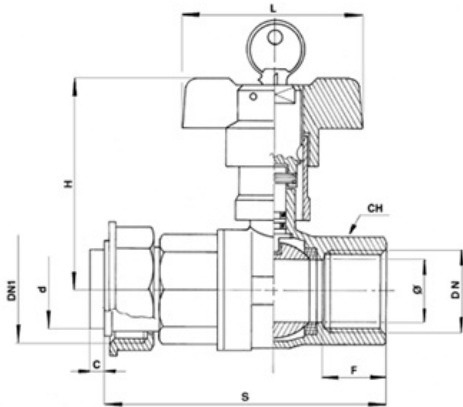


DNxDN1	Code	Ø	H	S	L	F	C	CH	d	PN	KG	P/box
1" x 1"1/4	077534000272	25	83	105	70	22	5	38	30	5	1,05	5

Advantages

Technical data

Art. 7514



Materials

1	Body	Brass	CuZn40Pb2	Nickel-plated
2	Body end	Brass	CuZn40Pb2	Nickel-plated
3	Ball	Brass	CuZn40Pb2	Chrome-plated
4	Seats	P.T.F.E.		
5	O-Ring	FKM		
6	O-Ring	NBR		
7	Stem	Brass	CuZn39Pb3	
8	Elastic pin	Steel		
9	Screwed ring	Brass	CuZn40Pb2	Nickel-plated
10	Butterfly handle	Aluminium	GD-AISI12Cu2Fe	Yellow
11	Elastic pin	Steel		
12	Locking device	Brass	CuZn39Pb3	

Connections

F/F: ISO 7/1Rp (parallel) - M/F: male ISO 7/1R (tapered), female ISO 7/1Rp (parallel)


Limit

-20°+70° (without liquid)


Notes

The max.working pressure (PN) means at a room temperature of about 23°C.

Pressure Loss Chart

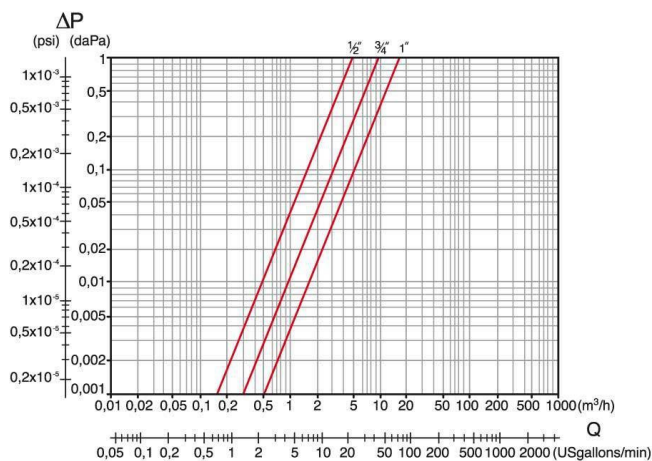

Temperature/Pressure

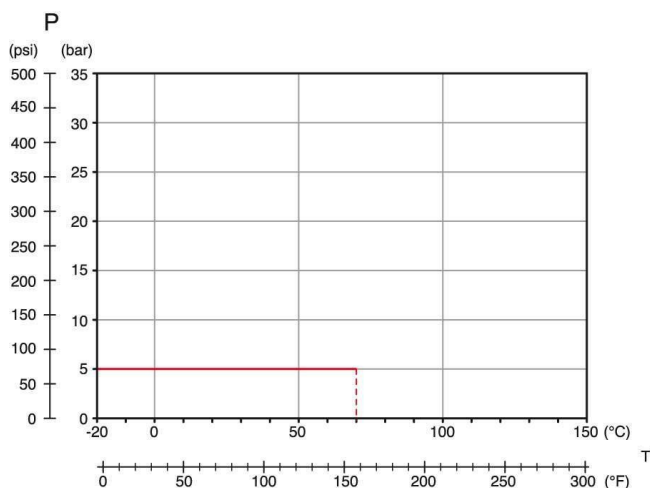

Approvals

