




RIV 5263

Ball valve M/M
 full bore
 clockwise steel lever handle


Tech drawings and tables

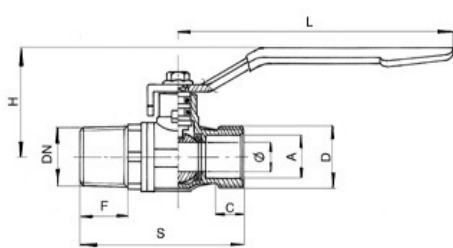

| DN | Code | Ø | H | S | L | F | A | C | P | N | KG | P/box |
|-----------|--------------|----|----|----|----|----|----|---|----|------|----|-------|
| 1/2"x1/2" | 025263000183 | 10 | 36 | 56 | 96 | 16 | 15 | 9 | 40 | 0,14 | 25 | |
| 3/8"x1/2" | 025263000147 | 10 | 36 | 54 | 96 | 13 | 15 | 9 | 40 | 0,13 | 25 | |

Technical data

Art. 5263

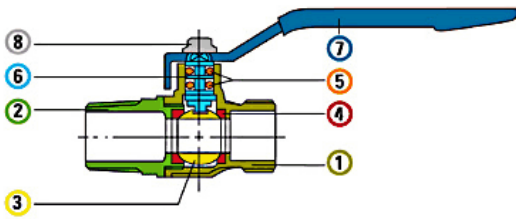

Materials

| | | | | |
|---|----------|----------|-----------|---------------|
| 1 | Body | Brass | CuZn40Pb2 | Nickel-plated |
| 2 | Body end | Brass | CuZn40Pb2 | Nickel-plated |
| 3 | Ball | Brass | CuZn40Pb2 | Chrome-plated |
| 4 | Seats | P.T.F.E. | | |
| 5 | O-Ring | NBR | | |
| 6 | Stem | Brass | CuZn39Pb3 | |
| 7 | Lever | Steel | Fe P11 | Zinc-plated |
| 8 | Screw | Steel | | Zinc-plated |

Connections

Body ISO 228/1 (parallel), body end ISO 7/1R (tapered)


Limit

-20°+110° (without liquid)


Notes

The max.working pressure (PN) means at a room temperature of about 23°C.

Pressure Loss Chart

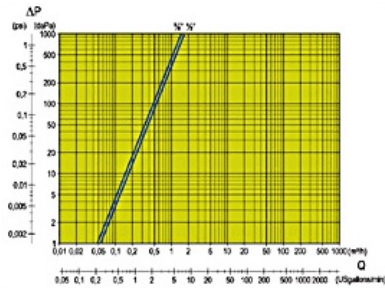

Temperature/Pressure

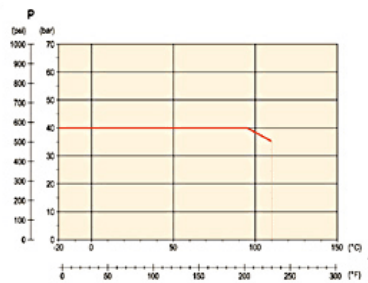

Kv & Cv Coefficients

Size Kv Cv

| | | |
|------|-----|-----|
| 3/8" | 5,1 | 5,9 |
| 1/2" | 5,9 | 6,8 |