




RIV 5192

Ball valve to embed F/F
full bore
zinc-alloy knob


Tech drawings and tables

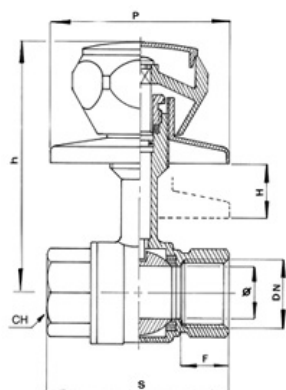

DN	Code	Ø	H	h	S	F	CH	P	PNP/box	
1/2"	025192000004	15	20	83	58	14	26	68	25	6
3/4"	025192000005	20	16	93	70	15	32	68	25	5
1"	025192000007	25	15	96	82	18	39	68	25	4

Technical data

Art. 5190



Materials

1	Body	Brass	Nickel-plated
2	Body end	Brass	Nickel-plated
3	Ball	Brass	Chrome-plated
4	Seats	P.T.F.E.	
5	O-Ring	NBR	
6	Tow packing	P.T.F.E.	
7	Stuffing-Box	Brass	
8	Stem	Brass	
9	Cap	Zinc alloy	Chrome-plated
10	Screwdown	Zinc alloy	Chrome-plated

Connections

ISO 228/1


Limit

-20 °C (without liquid) +130 °C


Notes

The max.working pressure (PN) means at a room temperature of about 23 °C.

Pressure Loss Chart

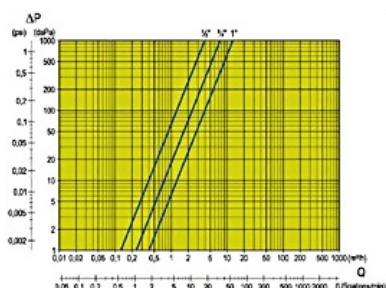

Temperature/Pressure

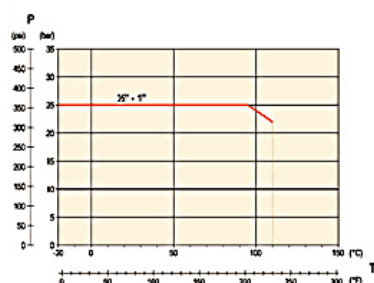

Kv & Cv Coefficients

Size	Kv	Cv
1/2"	14,0	16,2
3/4"	27,0	31,0
1"	44,0	51,0