




RIV 5310

Three-way ball valve F/F/F
 "T" boring
 full bore
 aluminium lever handle


Tech drawings and tables

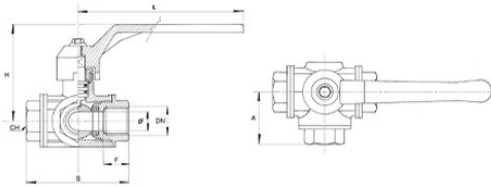

DN	Code	Ø	H	S	L	F	A	CH1	PN	KG	P/box
1/4"	025310000002	10	65	77	125	19	38	22	40	0,74	4
3/8"	025310000003	12	65	77	125	19	38	22	40	0,68	4
1/2"	025310000004	14	65	77	125	19	38	27	40	0,67	4
3/4"	025310000005	18	83	92	145	23	46	34	36	1,13	2
1"	025310000007	23	96	104	170	25	52	41	36	1,70	2
1"1/4	025310000008	29	102	118	170	27	59	50	32	2,30	2
1"1/2	025310000009	36	109	138	170	31	69	57	25	3,70	2
2"	025310000011	45	139	162	260	36	81	70	20	6,00	2

Technical data

Art. 5310 - 5311

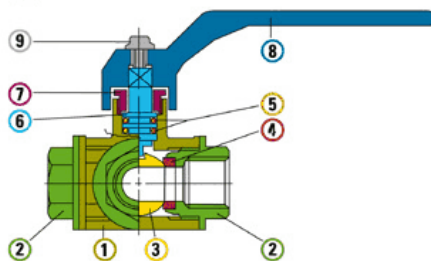

Materials				
1	Body	Brass	CuZn40Pb2	Nicke-plated
2	Body end	Brass	CuZn40Pb2	Nicke-plated
3	Ball	Brass	CuZn40Pb2	Chrome-plated
4	Seats	P.T.F.E.		
5	O-Ring	NBR		
6	Stem	Brass	CuZn39Pb3	
7	Stuffing-Box	Brass	CuZn39Pb3	
8	Lever	Aluminium	GD-AISI12Cu2Fe	Red
9	Screw	Steel		Zinc-plated

Connections

ISO 228/1

Limit

-10°+110° (without liquid)

Notes

The max.working pressure (PN) means at a room temperature of about 23°C.

Pressure Loss Chart

