




RIV 166

Single-acting hydraulic jack
Zinc-plated
Perla / Diamante / Centurion / Vulcano series

Tech drawings and tables

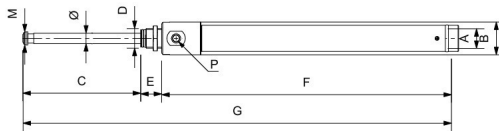

DN	Code	Ø	F	B	C	D	E	G	M	P	KG	P/box
4"	050166000016	16	442	50	122	M30x2	32	596	20	1/4"	3,518	1
5"	050166000018	16	442	50	151	M30x2	32	625	20	1/4"	3,559	1
6"	050166000000	16	442	50	180	M30x2	32	654	20	1/4"	3,657	1
8"	050166000020	16	542	50	246	M35x2	32	821	23	1/4"	4,326	1

Advantages

It improves the working and service life of the RIV gate valves.
External protective zinc-coating.

Technical data

Limit	-10°C +80°C
Notes	MINIMUM OPERATING PRESSURE: 4", 5", 6" = 110 Bar (1595 Psi) 8" = 130 Bar (1885 Psi)
	MAXIMUM ALLOWABLE WORKING PRESSURE: 170 Bar (2465 Psi)