




## RIV 3320

Three-way fitting F/M/M

### Tech drawings and tables




DN	Code	H	L	PN	KG	P/box
3/4"	033320000005	53	57	16	0,084	10

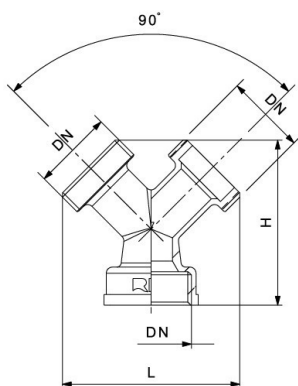

### Advantages


The "SWIFT" bayonet fastenings feature the same bayonet coupling for all sizes.

Therefore couplings of different dimensions, with hose-connections or threaded ones, from 1/2" to 1 1/2" (see drawings) can be joined very simply and safely, composing the required connection or reduction according to needs.



## Technical data

Art. 3300



### Materials

1	Body	Brass CW617N
2	Gasket	NBR
3	Gasket	NBR

### Connections

ISO 228/1

### Limit

-10°C (without liquid) +90°C

### Notes

The max. working pressure (PN) means at a room temperature of about 23°C.