




RIV 165

Double-acting pneumatic jack
with position sensors
Gladio series

Tech drawings and tables

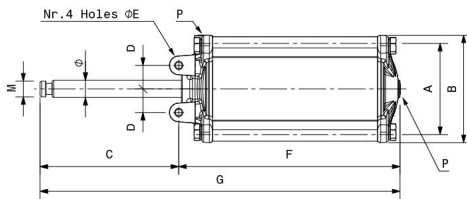

DN	Code	Ø	F	A	B	C	D	E	G	M	P	KG	P/box
4"	050165000016	22	236,5	125	137	131,5	30	M10	368	20	1/4"	7,586	1
5"	050165000018	22	261,5	125	137	156,5	30	M10	418	20	1/4"	7,865	1
6"	050165000019	22	281,5	125	137	176,5	30	M10	458	20	1/4"	8,029	1
8"	050165000020	22	331,5	125	137	232,5	30	M10	564	22	1/4"	8,611	1
10"	050165000021	32	430	160	180	320,5	45	M12	750,5	28	1/4"	16,944	1

Advantages

Created for better operation and longer life of RIV gate valves.

Technical data

Limit	-10°C +80°C
Notes	MINIMUM OPERATING PRESSURE: 4", 5", 6" = 4 Bar (60 Psi) 8" = 5 Bar (75 Psi)
	MAXIMUM OPERATING PRESSURE: 12 Bar (175 Psi)