




RIV 7621

Unified complete bracket for gas meter
with a 110 mm. centre-to-centre distance
with pressure gauge connection
rag bolt to embed
aluminium sealing butterfly handle

Tech drawings and tables

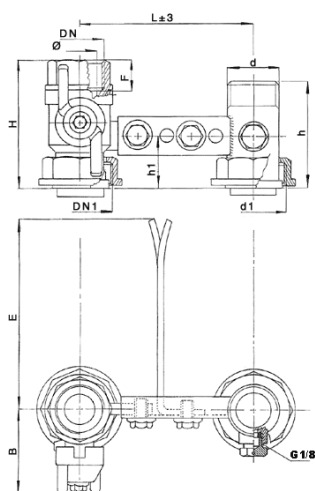


DNxDN1	Code	Ø	H	h	L	F	B	E	d1	d	h1	PN	KG	P/box
1" x 1"1/4	077621000278	22	82,5	70	110	23	54	155	1"1/4	1"	32,5	5	0,98	5
1" x 1"1/4	077621000281	20	81,5	70	110	23	52,5	155	1"1/4	1"	32,5	5	0,91	5

Advantages

Technical data

Art. 7564

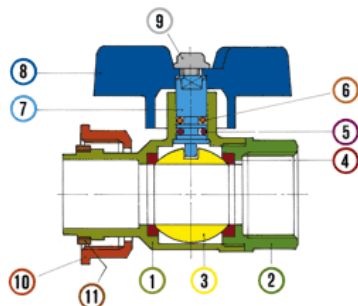

Materials

1	Body	Brass	CuZn40Pb2	
2	Body end	Brass	CuZn40Pb2	
3	Ball	Brass	CuZn40Pb2	Chrome-plated
4	Seats	P.T.F.E.		
5	O-Ring	FKM		
6	O-Ring	NBR		
7	Stem	Brass	CuZn39Pb3	
8	Butterfly handle	Aluminium	GD-AISI12Cu2Fe	Yellow
9	Screw	Steel		Zinc-plated
10	Swivel nut	Brass	CuZn40Pb2	
11	Screwed ring	Brass	CuZn39Pb3	

Connections

Female ISO 7/1Rp (parallel), screwed ring ISO 228/1


Limit

-20°+70° (without liquid)


Notes

The max.working pressure (PN) means at a room temperature of about 23°C.

Pressure Loss Chart

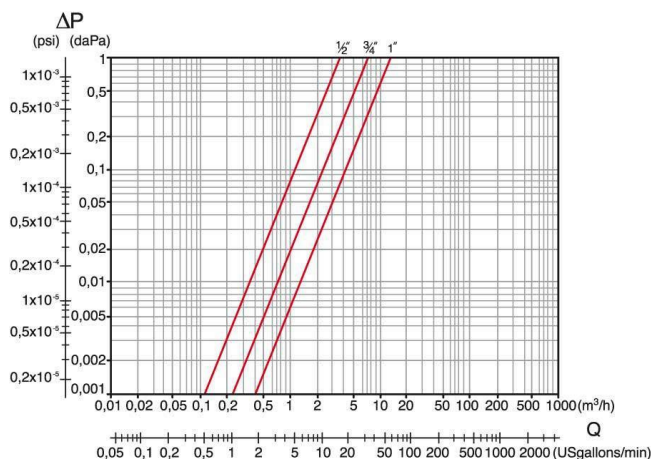

Temperature/Pressure

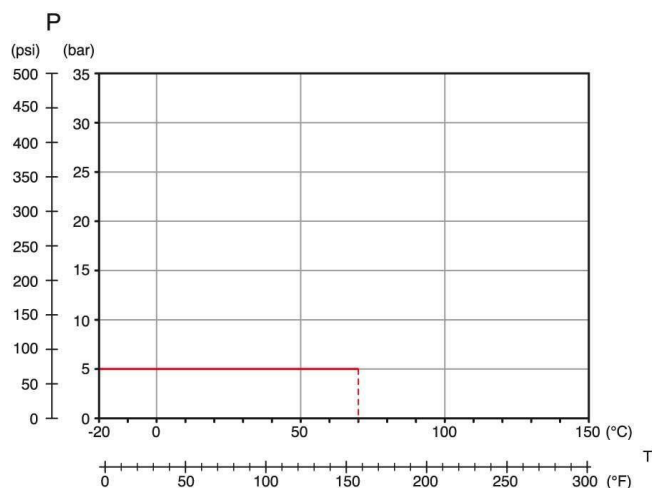

Kv & Cv Coefficients

Size Kv Cv

1"	42,0	-
3/4"	24,0	-
1/2"	11,5	-

Approvals

