





RIV 7664

Unified complete bracket for gas meter
with a 110 mm. centre-to-centre distance
and tamperproof key locking device
rag bolt for expansion bosses
aluminium butterfly handle


Tech drawings and tables



DNxDN1	Code	Ø	H	h	L	F	B	E	M	d1	d	h1	PN	KG	P/box
1" x 1"1/4	077664000281	20	81,5	70	110	23	93	110	63	1"1/4	1"	32,5	5	0,98	5
1" x 1"1/4	077664000278	22	82,5	70	110	23	102	110	80	1"1/4	1"	32,5	5	1,15	5
1/2" x 1"1/4	077664000194	12,5	62	77	110	16	94,5	110	71,5	1"1/4	1/2"	32,5	5	0,95	5
1/2" x 3/4"	077664000193	12,5	62	62	110	16	94,5	110	71,5	3/4"	1/2"	32,5	5	0,75	5
3/4" x 1"1/4	077664000235	16	72	72	110	17,5	98	110	75	1"1/4	3/4"	32,5	5	1,01	5
3/4" x 1"1/4	077664000236	16	72	70	110	17,5	98	110	75	1"1/4	1"	32,5	5	1,00	5

Advantages

Technical data

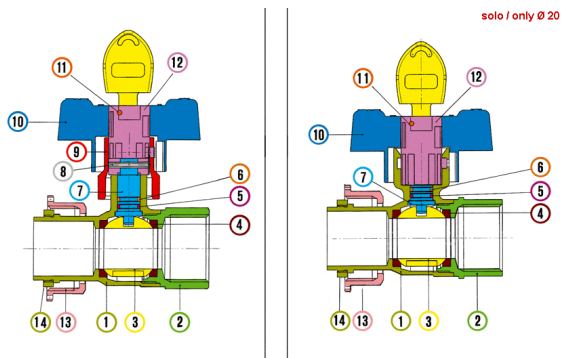

Materials

Part No.	Part Name	Material	Material Code	Notes
1	Body	Brass	CuZn40Pb2	
2	Body end	Brass	CuZn40Pb2	
3	Ball	Brass	CuZn40Pb2	Chrome-plated
4	Seats	P.T.F.E.		
5	O-Ring	FKM		
6	O-Ring	NBR		
7	Stem	Brass	CuZn39Pb3	
8	Elastic pin	Steel		
9	Screwed ring	Zinc alloy	ZnAl4Cu1	
10	Butterfly handle	Aluminium	GD-AISI12Cu2Fe	Yellow
11	Elastic pin	Steel		
12	Locking device	Zinc alloy	ZnAl4Cu1	
13	Swivel nut	Brass	CuZn40Pb2	
14	Screwed ring	Brass	CuZn39Pb3	

Connections

Female ISO 7/1Rp (parallel), screwed ring ISO 228/1


Limit

-20°+70° (without liquid)


Notes

The max.working pressure (PN) means at a room temperature of about 23°C.

Pressure Loss Chart

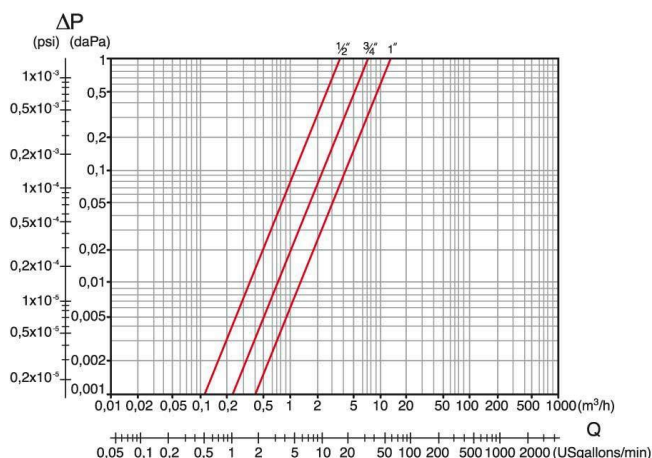

Temperature/Pressure

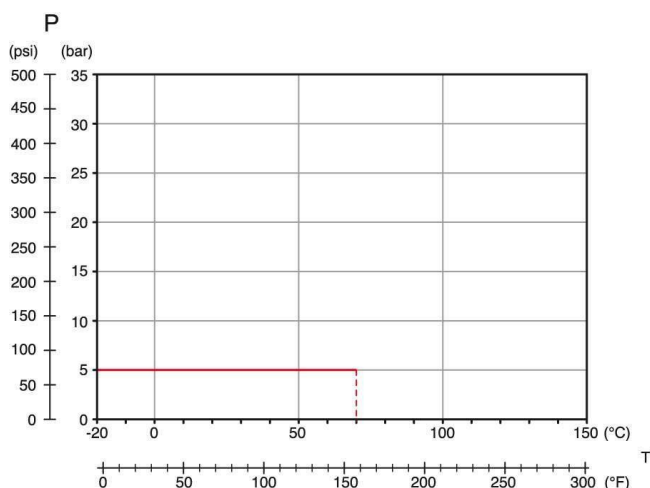

Kv & Cv Coefficients

Size Kv Cv

1" 42,0 -

3/4" 24,0 -

1/2" 11,5 -

Approvals



RIV Rubinetterie Italiane Velatta S.p.A. - Via delle Acacie, 8 Zona Industriale D4 - 28075 GRIGNASCO (NO) - ITALY
Tel +39 0163 4151 Fax +39 0163 411914 E-mail riv-vg@riv-vg.com Web www.riv-vg.com

Capitale sociale € 516.000 i.v. - Reg. Imprese di Novara N° 00469610026 - R.E.A. di Novara N° 170397
Numero Meccanografico NO009263 - Codice Fiscale: 00469610026 - Partita IVA: IT 01399720034

