





## RIV 7684

Unified complete bracket for gas meter  
with a 110 mm. centre-to-centre distance  
and tamperproof key locking device  
reinforced double-pipe rag bolt  
aluminium butterfly handle


### Tech drawings and tables



DNxDN1	Code	Ø	H	h	L	F	B	E	M	d1	d	h1	PN	KG	P/box
1" x 1"1/4	077684000281	20	81,5	70	110	23	93	100	63	1"1/4	1"	32,5	5	1,24	5
1" x 1"1/4	077684000278	22	82,5	70	110	23	102	100	80	1"1/4	1"	32,5	5	1,41	5
1/2" x 1"1/4	077684000194	12,5	62	77	110	16	94,5	100	71,5	1"1/4	1/2"	32,5	5	1,20	5
1/2" x 3/4"	077684000193	12,5	62	62	110	16	94,5	100	71,5	3/4"	1/2"	32,5	5	1,00	5
3/4" x 1"1/4	077684000235	16	72	72	110	17,5	98	100	75	1"1/4	3/4"	32,5	5	1,27	5
3/4" x 1"1/4	077684000236	16	72	70	110	17,5	98	100	75	1"1/4	1"	32,5	5	1,26	5

### Advantages


## Technical data

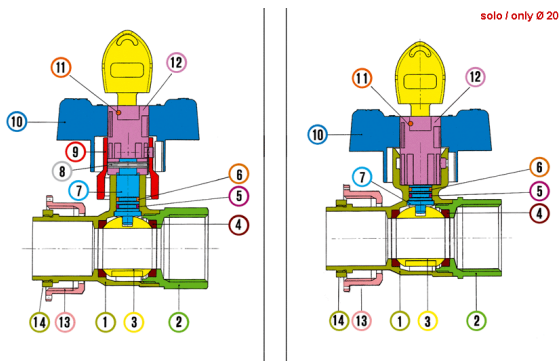


Materials			
1	Body	Brass	CuZn40Pb2
2	Body end	Brass	CuZn40Pb2
3	Ball	Brass	CuZn40Pb2 Chrome-plated
4	Seats	P.T.F.E.	
5	O-Ring	FKM	
6	O-Ring	NBR	
7	Stem	Brass	CuZn39Pb3
8	Elastic pin	Steel	
9	Screwed ring	Zinc alloy	ZnAl4Cu1
10	Butterfly handle	Aluminium	GD-AISI12Cu2Fe Yellow
11	Elastic pin	Steel	
12	Locking device	Zinc alloy	ZnAl4Cu1
13	Swivel nut	Brass	CuZn40Pb2
14	Screwed ring	Brass	CuZn39Pb3

<b>Connections</b>	Female ISO 7/1Rp (parallel), screwed ring ISO 228/1
<b>Limit</b>	-20°+70° (without liquid)
<b>Notes</b>	The max.working pressure (PN) means at a room temperature of about 23°C.

## Pressure Loss Chart

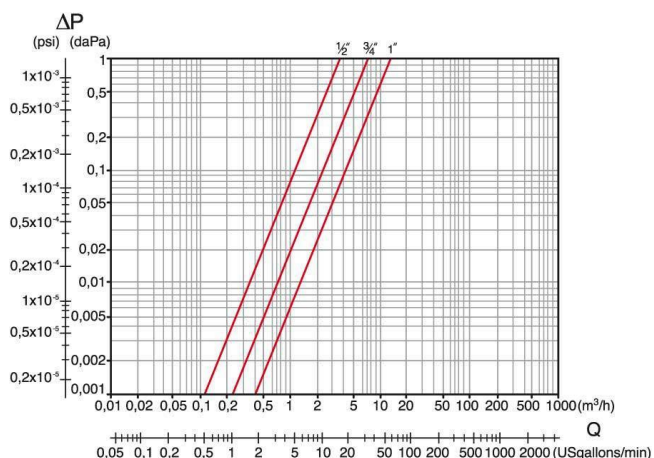

## Temperature/Pressure

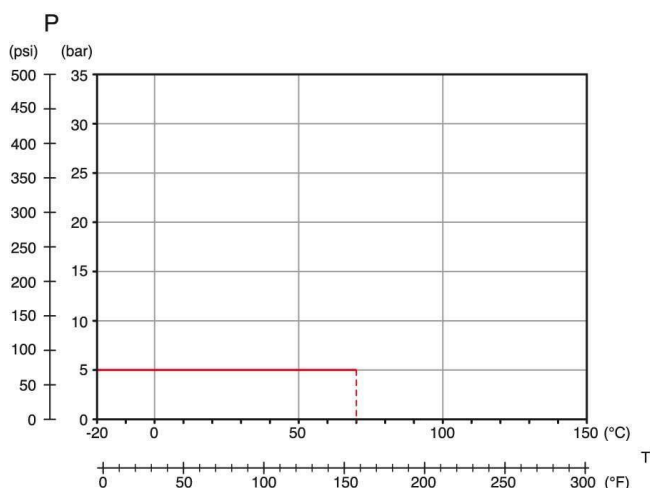

## Kv & Cv Coefficients

Size	Kv	Cv
1"	42,0	-
3/4"	24,0	-
1/2"	11,5	-

## Approvals



RIV Rubinetterie Italiane Velatta S.p.A. - Via delle Acacie, 8 Zona Industriale D4 - 28075 GRIGNASCO (NO) - ITALY  
Tel +39 0163 4151 Fax +39 0163 411914 E-mail riv-vg@riv-vg.com Web www.riv-vg.com

Capitale sociale € 516.000 i.v. - Reg. Imprese di Novara N° 00469610026 - R.E.A. di Novara N° 170397  
Numero Meccanografico NO009263 - Codice Fiscale: 00469610026 - Partita IVA: IT 01399720034

