




RIV 2943

Water piston pressure reducing valve
with F/F connections
stainless steel seat
3 bar setting outlet
adjustable from 0,5 to 6 bar


Tech drawings and tables

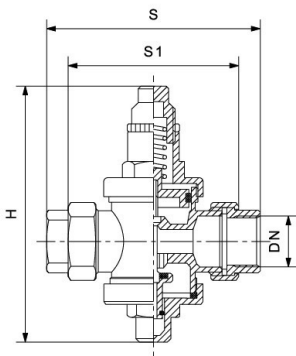

DN	Code	H	S	S1	PN	KG	P/box
1/2"	032943000004	120	112	75	25 in entrata	0,948	1
3/4"	032943000005	160	135	88	25 in entrata	1,648	1
1"	032943000007	166	140	93	25 in entrata	1,906	1
1"1/4	032943000008	220	170	110	25 in entrata	3,039	1
1"1/2	032943000009	220	175	110	25 in entrata	3,502	1
2"	032943000011	250	200	130	25 in entrata	5,459	1

Technical data

RIV 2940



Materials			
1	Spring tightener	Brass	CW617N
2	Screwed ring	Brass	CW614N
3	Spring	Steel	
4	Cap	Brass	CW617N
5	Diaphragm	Brass	CW617N
6	O-Ring	NBR	
7	Nut	Brass	CW617N
8	Seal ring	Brass	CW614N
9	Stem	Brass	CW614N
10	Fitting	Brass	CW617N
11	Seat	Stainless steel	
12	Gasket	Fasit	
13	Body	Brass	CW617N
14	Disc	Brass	CW614N
15	Gasket	Fasit	
16	O-Ring	NBR	
17	Plug	Brass	CW617N

Connections	ISO 228/1
Limit	-10°C (without liquid) +80°C
Notes	The max. working pressure (PN) means at a room temperature of about 23°C.