




3004

Gomito a 90° - 90° elbow - Coude à 90° - Codo 90° - Winkel 90° - Колено 90°

PE100RC - S5 Gas - PN 16 20°C

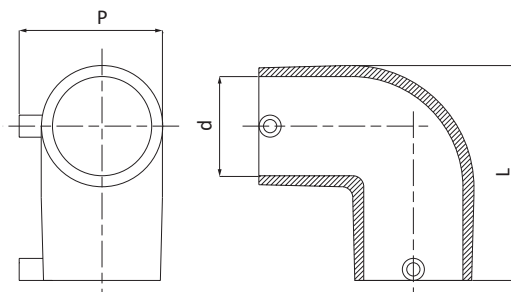

PE100 - SDR11 - S5

ACQUA: PFA (PN)=16 bar 20°C

GAS: MOP=10 bar; In Italia MOP=5 bar (D.M. 24/11/84, D.M. 16/4/2008 e successive modifiche)

Per il tempo di saldatura da utilizzare con tubo SDR26 contattare direttamente Unidelta.

PE100 - SDR11 - S5

WATER: PFA (PN)=16 bar 20°C

GAS: MOP=10 bar; in Italy MOP=5 bar (D.M. 24/11/84, D.M. 16/4/2008 and further modification)

Contact Unidelta directly for the welding time to be used with SDR26 pipe.

DIM dxd [mm]	CODE	DIM MAX LxHxP [mm]	L [mm]	P [mm]	W-SDR	PACK [UMV]				
						RIF. 10	RIF. 11	RIF. 2	RIF. 5	Sfusi Loose
20x20	3004021000001	62x62x50	62	50	≤ 11	-	40	-	-	-
25x25	3004026000001	69x69x55	69	55	≤ 11	-	25	-	-	-
32x32	3004033000001	77x77x62	77	62	≤ 11	-	20	-	-	-
40x40	3004041000001	88x88x71	88	71	≤ 17	-	12	-	-	-
50x50	3004051000001	103x103x82	103	82	≤ 17	-	10	-	-	-
63x63	3004064000001	121x121x96	121	96	≤ 17	-	-	10	-	-
75x75	3004076000001	142x142x109	142	109	≤ 17	-	-	8	-	-
90x90	3004091000001	166x166x126	166	126	≤ 17	16	-	-	-	-
110x110	3004111000001	198x198x148	198	148	≤ 17	-	-	-	10	-
125x125	3004125000001	240x240x175	240	175	≤ 17	-	-	-	6	-
*140x140	3004140000001	265x265x185	265	185	≤ 17	-	-	-	-	1
160x160	3004160000001	305x305x220	305	220	≤ 17	-	-	-	2	-
180x180	3004180000001	310x310x240	310	240	≤ 17	-	-	-	2	-
200x200	3004200000001	350x350x260	350	260	≤ 17	-	-	-	2	-
225x225	3004225000001	350x350x260	350	260	≤ 17	-	-	-	-	1
250x250	3004250000001	425x425x325	425	325	≤ 17	-	-	-	-	1

* Disponibile solo a spira scoperta - * Available only with uncovered coil - * Disponible seulement avec spirale découverte

* Disponible sólo con resistencia no cubierta - * Nur mit entdeckten Windung verfügbar - * Доступно только с открытой спиралью